


Titan TRACTION HOIST

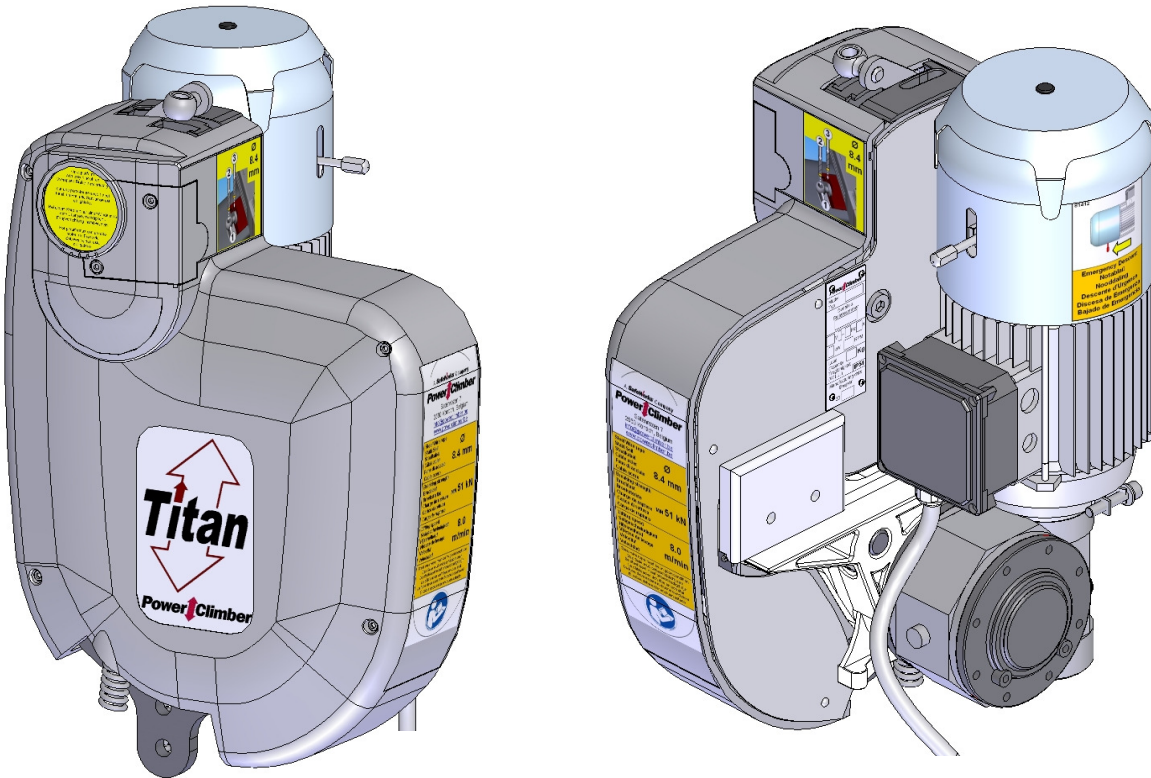


Standard features

- Self-reeving traction hoist
- Load dependant traction system
- Built-in Slack rope safety device
- Electro-mechanical service brake
- 'No Power' emergency descent system
- Climbing speed: 8.5 m/min.
- Self weight: 36 kg
- Safety rope and suspension cable: Ø8.4 mm (56 kN)

| Model | Electric Motor | Capacity | Current | |
|--------------|-------------------------------|----------|---------|----------|
| | | | Running | Starting |
| TITAN 403-PI | Three phase-400V-50Hz-0.74 kW | 400 kg | 2.5 A | 7.5 A |
| TITAN 503-PI | Three phase-400V-50Hz-0.75kW | 500 kg | 2.5 A | 7.5 A |
| TITAN 703-PI | Three phase-400V-50Hz-1.0kW | 700 kg | 2.5 A | 7.5 A |

Options:

- Additional overspeed safety device (to add to existing slack rope safety device)
- Overload detection device

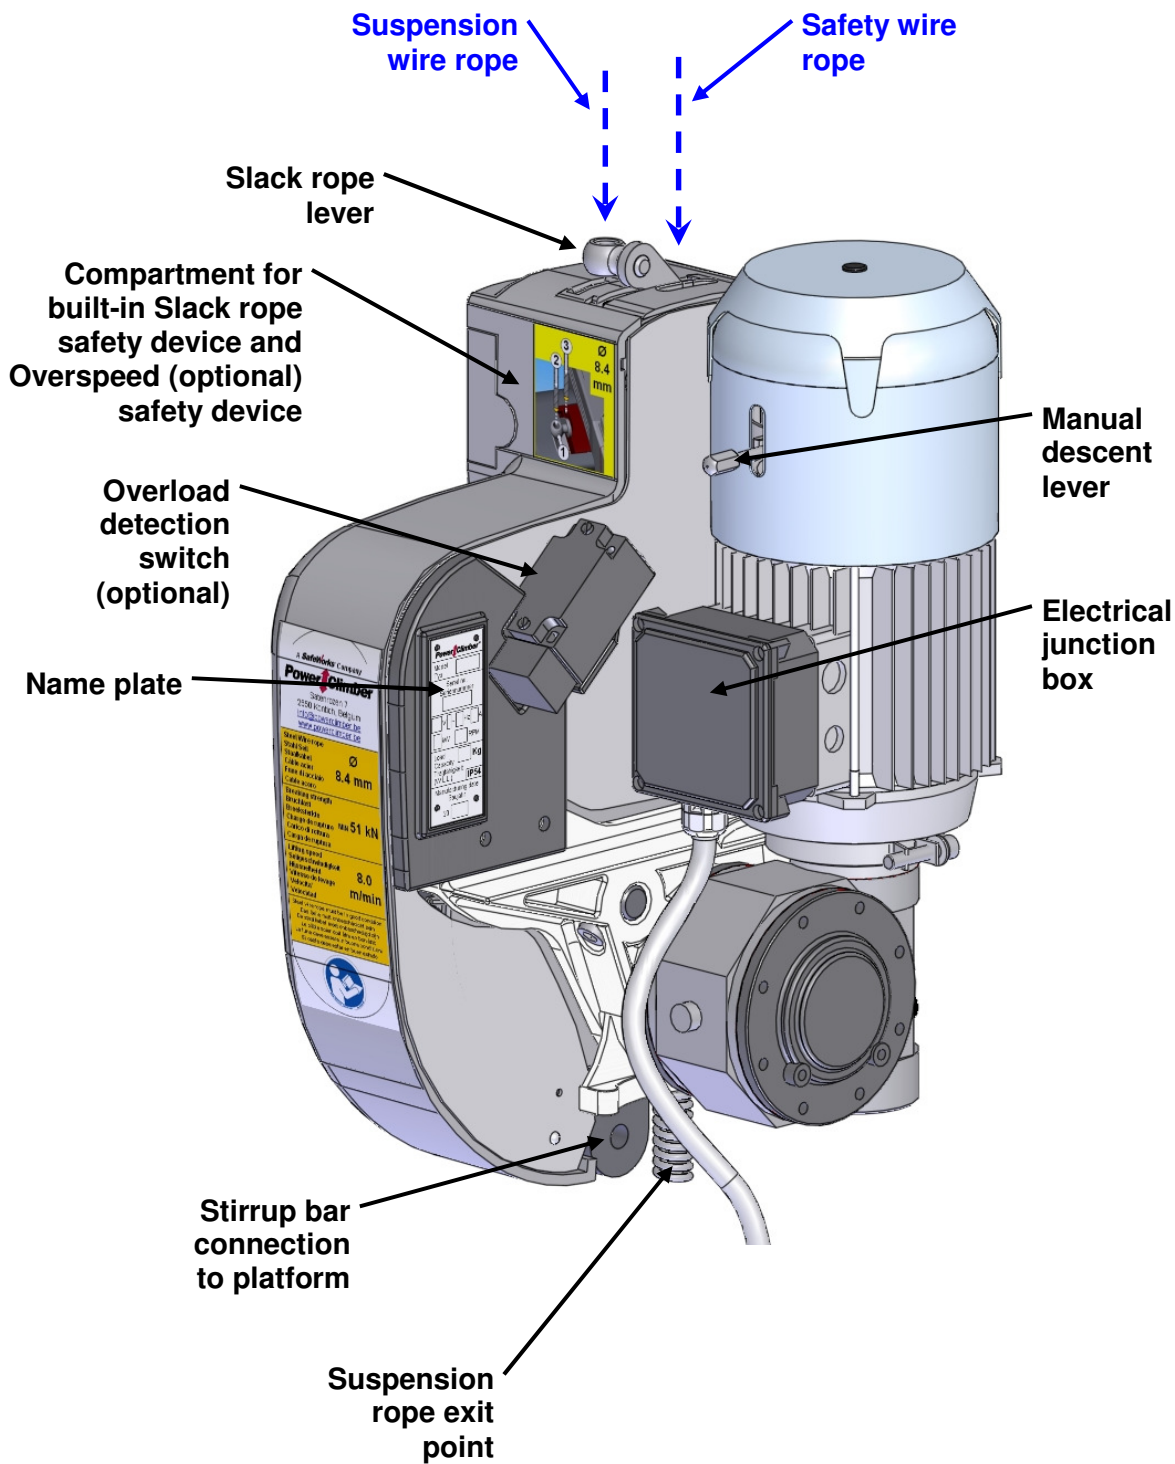

| | |
|--|---|
| Ref.: 38136-01 | Issue Date: 01-March-2007 |
| POWER CLIMBER bvba Tel: +32-3-451.05.00 Fax: +32-3-451.05.01 E-mail: Info@PowerClimber.be | POWER CLIMBER ASIA Ltd. Tel: +852-2310.2855 Fax: +852-2745.0755 E-mail: Infopcal@PowerClimber.com.hk |
| Website: www.PowerClimber.be | |

This document and all copies are property of Power Climber bvba. All dimensions and data are indicative only. The user must ensure that the equipment complies with local rules and regulations.